

M32

Digital Console for Live and Studio with
40 Input Channels, 32 Midas Microphone
Preamplifiers and 25 Mix Buses

Technical Specifications

Processing

Input Processing Channels	32 Input Channels, 8 Aux Channels, 8 FX Return Channels
Output Processing Channels	16
16 aux buses, 6 matrices, main LRC	100
Internal Effects Engines (True Stereo / Mono)	16
Internal Show Automation (structured Cues / Snippets)	500 / 100
Internal Total Recall Scenes (incl. Preamplifiers and Faders)	100
Signal Processing	40-Bit Floating Point
A/D Conversion (8-channel, 96 kHz ready)	114 dB Dynamic Range (A-weighted*)
D/A Conversion (stereo, 96 kHz ready)	120 dB Dynamic Range (A-weighted*)
I/O Latency (Console Input to Output)	0.8 ms
Network Latency (Stage Box In > Console > Stage Box Out)	1.1 ms

Connectors

MIDAS PRO Series Microphone Preamplifier (XLR)	32
Talkback Microphone Input (XLR)	1
RCA Inputs / Outputs	2
XLR Outputs	16
Monitoring Outputs (XLR / ¼" TRS Balanced)	2
Aux Inputs/Outputs (¼" TRS Balanced)	6
Phones Output (¼" TRS)	2 (Stereo)
Digital AES/EBU Output (XLR)	1
AES50 Ports (KLARK TEKNIK SuperMAC)	2

Expansion Card Interface	32 Channel Audio Input / Output
ULTRANET P-16 Connector (No Power Supplied)	1
MIDI Inputs / Outputs	1
USB Type A (Audio and Data Import / Export)	1
USB Type B, rear panel, for remote control	1
Ethernet, RJ45, rear panel, for remote control	1

Mic Input Characteristics

Design	MIDAS PRO Series
THD+N (0 dB gain, 0 dBu output)	<0.01% (unweighted)
THD+N (+40 dB gain, 0 dBu to +20 dBu output)	<0.03% (unweighted)
Input Impedance (Unbalanced / Balanced)	10 kΩ / 10 kΩ
Non-Clip Maximum Input Level	+23 dBu
Phantom Power (Switchable per Input)	+48 V
Equivalent Input Noise @ +45 dB gain (150 Ω source)	-125 dB (22 Hz-22 kHz, unweighted)
CMRR @ Unity Gain (Typical)	>70 dB
CMRR @ 40 dB Gain (Typical)	>90 dB

Input/Output Characteristics

Frequency Response @ 48 kHz	0 dB to -1 dB (20 Hz-20 kHz)
Sample Rate	
Dynamic Range, Analogue In to Analogue Out	106 dB (22 Hz-22 kHz, unweighted)
A/D Dynamic Range, Preamplifier and Converter (Typical)	109 dB (22 Hz-22 kHz, unweighted)
D/A Dynamic Range, Converter and Output (Typical)	109 dB (22 Hz-22 kHz, unweighted)
Crosstalk Rejection @ 1 kHz, Adjacent Channels	100 dB

Digital

M32

Digital Console for Live and Studio with
40 Input Channels, 32 Midas Microphone
Preamplifiers and 25 Mix Buses

Output level, XLR Connectors (Nominal / Maximum)	+4 dBu / +21 dBu
Output Impedance, XLR Connectors (Unbalanced / Balanced)	50 Ω / 50 Ω
Input impedance, TRS Connectors (Unbalanced / Balanced)	20 kΩ / 40 kΩ
Non-Clip Maximum Input Level, TRS Connectors	+21 dBu
Output Level, TRS (Nominal / Maximum)	+4 dBu / +21 dBu
Output Impedance, TRS (Unbalanced / Balanced)	50 Ω / 50 Ω
Phones Output Impedance / Maximum output Level	40 Ω / +21 dBu (Stereo)
Residual Noise Level, Out 1-16 XLR Connectors, Unity Gain	-85 dBu 22 Hz-22 kHz unweighted
Residual Noise Level, Out 1-16 XLR Connectors, Muted	-88 dBu 22 Hz-22 kHz unweighted
Residual Noise Level, TRS and s Monitor out XLR Connector	-83 dBu 22 Hz-22 kHz unweighted

Display

Main Screen	7" TFT LCD, 800 x 480 Resolution, 262k Colours
Channel LCD Screen	128 x 64 LCD with RGB Colour Backlight
Main Meter	24 Segment (-57 dB to Clip)

Power

Switch-Mode Power Supply	Auto-Ranging 100-240 VAC (50/60 Hz) ± 10%
Power Consumption	120 W


Physical

Standard Operating Temperature Range	5°C – 40°C (41°F – 104°F)
Dimensions	891 x 612 x 256 mm (35.1 x 24.1 x 10.1")
Weight	25 kg (55 lbs)


* A-weighted figures are typically ~3 dB better

M32


Digital Console for Live and Studio with
40 Input Channels, 32 Midas Microphone
Preamplifiers and 25 Mix Buses

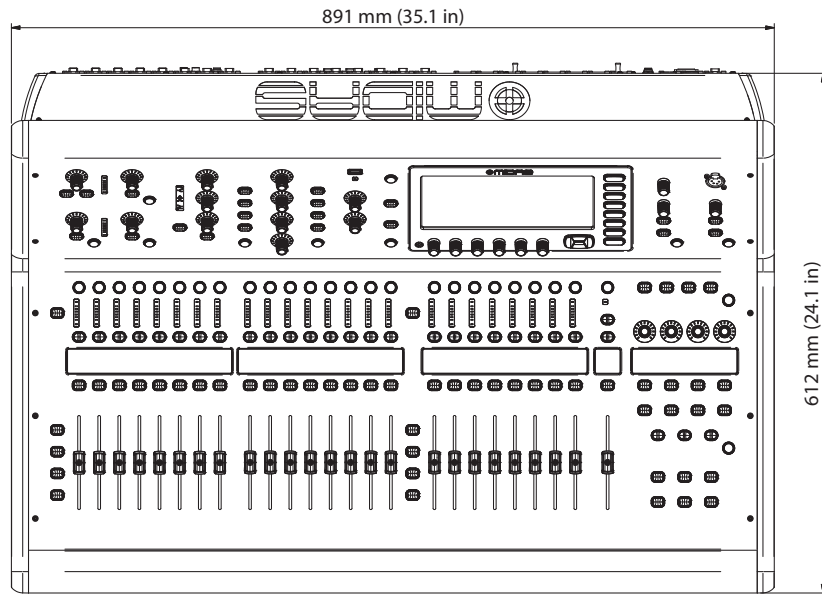

TOP VIEW

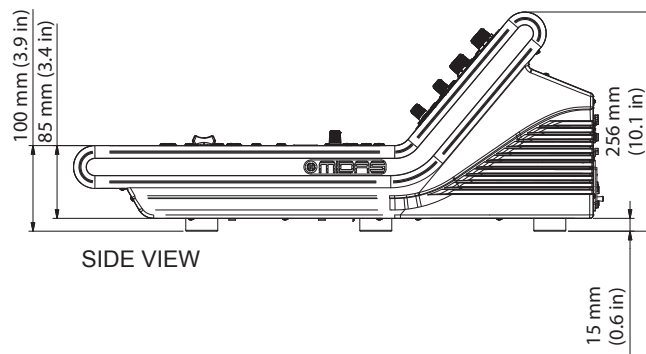

SIDE VIEW

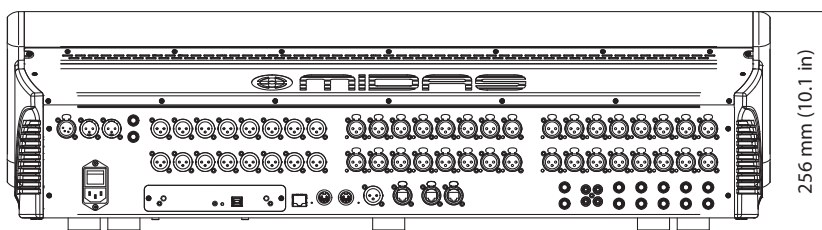

BACK VIEW

Digital

M32

Digital Console for Live and Studio with
40 Input Channels, 32 Midas Microphone
Preamplifiers and 25 Mix Buses

