overview

TECHNICAL DATA	ALPHA PROFILE 1500
Light source	Osram Lok-It 1500W
- Color Temperature (K)	6,000
- Luminous Flux (lm)	135,000
- Nominal Life (h)	750
- Socket	PGJ50
Power supplies available	200-240V 50/60Hz
Input Power	2,000VA
Electronic Ballast	•
Lamp controlled from the Lighting desk	•
Electronic Linear Zoom	9,5° to 60°
Extra Zoom range	7° to 9,5°
Electronic Focusing	autofocus
CMY	•
Linear CTO	•
Color Wheel	1 (6 colors + white)
CTO filter	
Frost	Zoom tracking + flood
Rotating gobo wheels	1 (6)
Fixed gobo wheels	1 (8)
Morphing effect	•
Rotating animation disc	
Rotating prisms	1(5 facet)
Rotating beam shaper(s)	
Mechanical high speed iris	HD
Animated Star Gobo (patented)	
Framing system (patented)	•
90° rotation of the framing system	•
0-100% dimmer on a dedicated channel	•
Shutter/strobe	•
Long life self charging buffer battery	•
Preset macros	•
Fuction reset from control unit	•
Autotest routine	•
Ethernet ready	•
Electronic monitoring with status error	•
Cooling system monitoring	•
DMX level monitoring on all channels	•
Internal data transmission diagnostics	•
Parameter electronic setting auto recovering	•
Firmware Upgrade with no power	•
Firmware upload from another fixture	•
Adjustable power (1,500 - 1,200 W)	•
PAN and TILT lock on 4 and 7 positions respectively	•
DMX control channels	39/43
Weight (Kg/lbs)	49.5 (109.13 lbs)
Dimensions LxWxH (mm/inches)	488x480x835 (19.21"x18.90"x32.87")

ALPHA SPOT HPE 1500	ALPHA BEAM 1500	ALPHA WASH 1500	ALPHA WASH 1500 LT
Osram Lok-It 1500W	Osram Lok-It 1500W	Osram Lok-It 1500W	Osram Lok-It 1500W
6,000	6,000	6,000	6,000
135,000	135,000	135,000	135,000
750	750	750	750
PGJ50	PGJ50	PGJ50	PGJ50
200-240V 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz	200-240V 50/60Hz
2,000VA	2,000VA	2,000VA	2,000VA
•	•	•	•
•	•	•	•
9,5° to 57°		11° to 74°	10° to 32° (55° with opt. frost)
7° to 9,5°			
autofocus	•		
•	•	•	•
•		•	•
1 (6 colors + white)	1 (6 colors + white)	2 (6+6 colors + white)	1 (6 colors + white)
	•		
Zoom tracking	3 (linear)	1 (fixed)	
2 (6+6)	1 (6)		
1 (8)	1 (8)		
•			
•			
1(5 facet)	2 (5 and 6 facet)		
	1	2	2
HD	•		
•			
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•		•	
•	•	•	•
36/40	24/28	20/23	19/22
49.5 (109.13 lbs)	40 (88.18 lbs)	45 (99.21 lbs)	46.7 (102.96 lbs)
488x480x835 (19.21"x18.90"x32.87")	488x480x846 (19.21"x18.90"x33.31")	488x480x785 (19.21"x18.90"x30.91")	488x480x867 (19.21"x18.90"x34.13")

SIZE & WEIGHT

ALPHA PROFILE | SPOT HPE 1500 49.5 Kg (109.13 lbs)

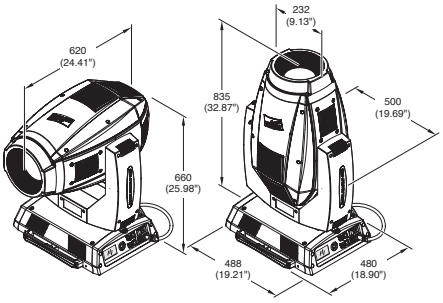

ALPHA BEAM 1500 40 Kg (88.18 lbs)

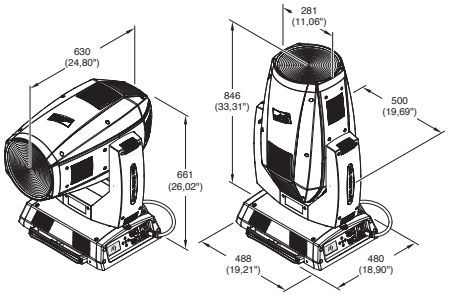

ALPHA WASH 1500 45 Kg (99,21 lbs)

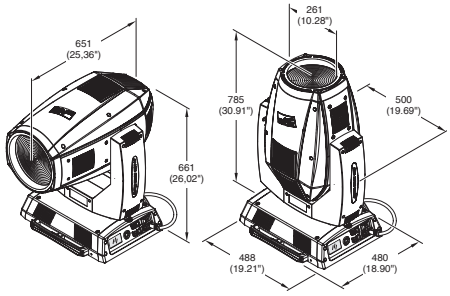

ALPHA WASH 1500 LT 46,7 Kg (102 lbs)

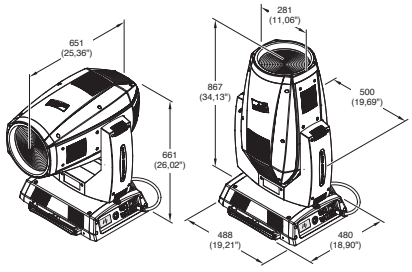

ACCESSORIES

Code L10096

LAMP - Supplied

OSRAM LAMP HTI 1500W/60/P50 LOK-IT



Code C21070

CLAMPS

48-51mm, max 300 Kg hook for truss

Code C61182

HANDLES

for products transportation



Code C61187

HEAVY FROST FILTER KIT

(only for Alpha Wash 1500 LT)



Code C61186

TOP HAT

(only for Alpha Wash 1500)



Code 183102/802

OMEGA - Supplied (2 pieces)

for fixing clamps



Code 105041/003

SAFETY CABLE

Ø 4mm, lenght 680mm

Code F21176

FOAM SHELL

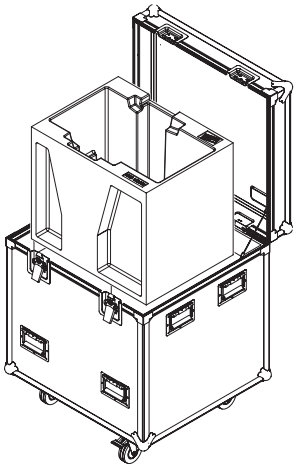

Code F21180

FLIGHT CASE

flight case
(including foam shell)
for 1 Alpha 1500